


Fanvil i61 video intercom system

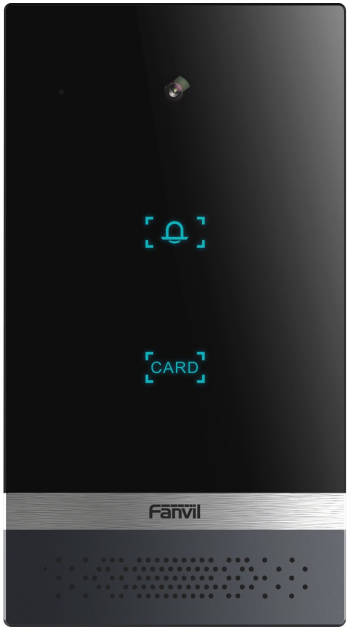

Artikel	128496
Herstellernummer	i61
EAN	6937295602906
Fanvil	

Based on SIP and ONVIF protocols, i61 is a video door phone that integrates powerful functionalities of access control, intercom, and security protection. Featuring an aluminum alloy design and single speed-dial touch button, i61 delivers a high-quality luxury appearance. With high protection level IP66 and IK07, it is waterproof, dustproof and anti-collision in most outdoor environments. i61 allows users to make audio/video calls via a speed-dial button and a 2 Mega-pixel camera and achieve access control by different modes. With rich input and output interfaces, i61 is easy to link with other security devices and customize into various solutions in apartments, commercial buildings, communities and industrial parks.

Zusammenfassung

Based on SIP and ONVIF protocols, i61 is a video door phone that integrates powerful functionalities of access control, intercom, and security protection. Featuring an aluminum alloy design and single speed-dial touch button, i61 delivers a high-quality luxury appearance. With high protection level IP66 and IK07, it is waterproof, dustproof and anti-collision in most outdoor environments. i61 allows users to make audio/video calls via a speed-dial button and a 2 Mega-pixel camera and achieve access control by different modes. With rich input and output interfaces, i61 is easy to link with other security devices and customize into various solutions in apartments, commercial buildings, communities and industrial parks.

Fanvil i61, Black, IP66, IK07, Vertical, Fast Ethernet, 10,1000 Mbit/s

Fanvil i61. Product colour: Black, International Protection (IP) code: IP66, IK code: IK07. Ethernet interface type: Fast Ethernet, Ethernet LAN data rates: 10,1000 Mbit/s, Networking standards: IEEE 802.3af. Megapixel (approx.): 2 MP, Sensor type: CMOS, Optical sensor size: 25.4 / 2.9 mm (1 / 2.9"). LED type: IR. AC adapter output voltage: 12 V, AC adapter output current: 1 A

Merkmale

Logistics data		Weight & dimensions	
Quantity per pack	1 pc(s)	Width	159.7 mm
		Depth	88 mm
		Height	36.1 mm
Night vision		Design	
Night vision	Y	Product colour	Black

LED type	IR	International Protection (IP) code	IP66
		IK code	IK07
		Placement supported	Vertical

Packaging data

Outdoor unit included	Y
Mounting kit	Y

Power

AC adapter output voltage	12 V
AC adapter output current	1 A

Management features

Web-based management	Y
DHCP client	Y
Syslog	Y

Operational conditions

Operating temperature (T-T)	-40 - 70 °C
Storage temperature (T-T)	-40 - 70 °C
Operating relative humidity (H-10 - 95% H)	

Camera

Megapixel (approx.)	2 MP
Sensor type	CMOS
Optical sensor size	25.4 / 2.9 mm (1 / 2.9")
Field of view (FOV) angle	141°
Viewing angle, horizontal	120°
Viewing angle, vertical	60°

Network

Ethernet interface type	Fast Ethernet
Ethernet LAN data rates	10,1000 Mbit/s
Ethernet LAN (RJ-45) ports	1
Wi-Fi	N
Power over Ethernet (PoE)	Y
Networking standards	IEEE 802.3af

Technical details

Connectivity technology	Wired
Colour	Y
Speakerphone	Y
Number of displays supported	1
Maximum number of cameras supported	1
Built-in speaker(s)	Y
Number of speakers	1
Speaker power	2.5 W
Memory card slot	Y
Compatible memory cards	MicroSD (TransFlash)
Maximum memory card size	128 GB
Door station control	Y
Voice codecs	G.711a, G.711u, G.722, G.723.1, G.726-32, G.729A, G.729B
Streaming capability	Y
Echo cancellation	Y
Wall mountable	Y
Video codecs	H.264
Motion detection function	Y
Volume control	Buttons
RFID reader	Y

Preisänderungen und Irrtümer vorbehalten. Alle Produkte solange der Vorrat reicht.