


# Equip 128653 USB cable

---

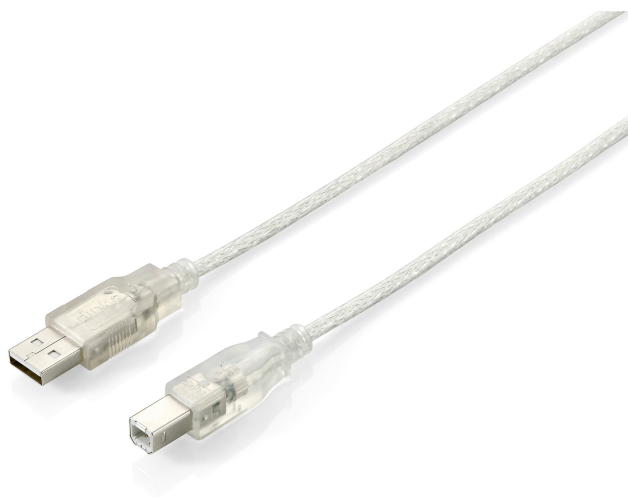

<b>Artikel</b>	21260517
<b>Herstellernummer</b>	128653
<b>EAN</b>	4015867117231
Equip	

The equip® USB type A male to type B male cable is high-quality with double shielding to help deliver ultrafast and error-free data transmissions for top performance. Simply plug-and-play to connect a computer (PC/Mac) or USB hub to a printer, scanner, multifunction printer (MFP) or other USB peripherals to achieve full high-speed transfer rate of up to 480Mbps.

## Zusammenfassung

---

The equip® USB type A male to type B male cable is high-quality with double shielding to help deliver ultrafast and error-free data transmissions for top performance. Simply plug-and-play to connect a computer (PC/Mac) or USB hub to a printer, scanner, multifunction printer (MFP) or other USB peripherals to achieve full high-speed transfer rate of up to 480Mbps.

Equip USB 2.0 Type A to Type B Cable, 1.0m , Transparent silver, 1 m, USB A, USB B, USB 2.0, Male/Male, Silver, Transparent

Equip USB 2.0 Type A to Type B Cable, 1.0m , Transparent silver. Cable length: 1 m. Connector 1: USB A, Connector 2: USB B, USB version: USB 2.0, Connector gender: Male/Male, Maximum data transfer rate: 0.48 Gbit/s, Product colour: Silver, Transparent, Magnetically shielded

## Merkmale

---

### Certificates

Compliance certificates	RoHS
-------------------------	------

### Logistics data

Harmonized System (HS) code	84733080
-----------------------------	----------

### Packaging content

Quantity per pack	1 pc(s)
-------------------	---------

### Packaging data

Package type	Bag
Package width	100 mm
Package depth	18 mm
Package height	175 mm
Package weight	38 g

### Weight & dimensions

Cable length	1 m
Width	16 mm
Depth	15 mm
Height	1000 mm
Weight	35 g

## Features

USB version	USB 2.0
Connector 1	USB A
Connector 2	USB B
Connector gender	Male/Male
Connector 1 gender	Male
Connector 2 gender	Male
Connector 1 form factor	Straight
Connector 2 form factor	Straight
AWG wire size	28
Magnetically shielded	Yes
Number of shielding layers	2
Maximum data transfer rate	480 Mbit/s
Maximum data transfer rate	0.48 Gbit/s
Product colour	Silver, Transparent
Plug and Play	Yes

Preisänderungen und Irrtümer vorbehalten. Alle Produkte solange der Vorrat reicht.