


# Asrock SPC741D8UD-2T/X550 motherboard

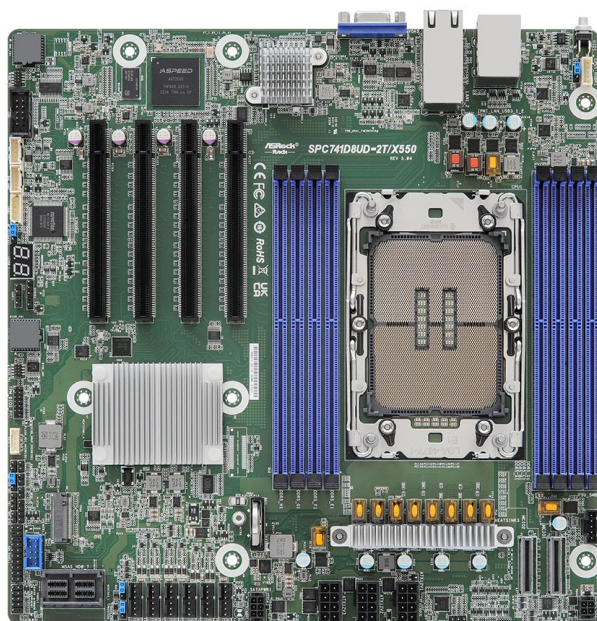

**Artikel  
Herstellernummer**  
Asrock

21294468  
SPC741D8UD-2T/X550

## Zusammenfassung

Asrock SPC741D8UD-2T/X550, Intel, LGA 4677 (Socket E), Intel® Xeon®, LGA 4677 (Socket E), DDR5-SDRAM, DIMM

Asrock SPC741D8UD-2T/X550. Processor manufacturer: Intel, Processor socket: LGA 4677 (Socket E), Compatible processor series: Intel® Xeon®. Supported memory types: DDR5-SDRAM, Memory slots type: DIMM, Memory voltage: 1.1 V. Supported storage drive interfaces: M.2, PCI Express 3.0, SATA III, Supported storage drive types: HDD & SSD, RAID levels: 0, 1, 5, 10. Graphics card family: ASPEED, Graphics card: AST2600. Ethernet interface type: 10 Gigabit Ethernet, LAN controller: Intel® X550-AT2

## Merkmale

### Graphics

Graphics card family	ASPEED
Graphics card	AST2600

### Weight & dimensions

Width	264.2 mm
Depth	266.7 mm

### Expansion slots

PCI Express x8 (Gen 5.x) slots	2
PCI Express x16 (Gen 5.x) slots	4

### Features

Motherboard chipset	Intel C741
Component for	Server
Motherboard form factor	micro ATX
Motherboard chipset family	Intel

### Memory

Supported memory types	DDR5-SDRAM
Number of memory slots	8
Memory slots type	DIMM
Memory voltage	1.1 V

### Processor

Processor manufacturer	Intel
Processor socket	LGA 4677 (Socket E)

Number of M.2 (M) slots	1
-------------------------	---

Compatible processor series	Intel® Xeon®
Supported processor sockets	LGA 4677 (Socket E)

## Network

Ethernet LAN	Yes
Ethernet interface type	10 Gigabit Ethernet
LAN controller	Intel® X550-AT2

## Operational conditions

Storage temperature (T-T)	-40 - 70 °C
Operating temperature (T-T)	10 - 35 °C
Storage relative humidity (H-H)	20 - 90%

## Rear panel I/O ports

USB 3.2 Gen 1 (3.1 Gen 1) Type-A ports quantity	2
IPMI LAN (RJ-45) port	Yes
VGA (D-Sub) ports quantity	1

## Storage controllers

Supported storage drive types	HDD & SSD
Supported storage drive interfaces	M.2, PCI Express 3.0, SATA III
RAID support	Yes
RAID levels	0, 1, 5, 10

## Internal I/O

USB 2.0 connectors	2
Number of SATA III connectors	9
Audio connector	Yes
ATX Power connector (24-pin)	Yes
Chassis intrusion connector	Yes
Number of COM connectors	1
TPM connector	Yes
12V power connector	Yes

Preisänderungen und Irrtümer vorbehalten. Alle Produkte solange der Vorrat reicht.