


Axis 02315-001 PoE adapter

Artikel	451954
Herstellernummer	02315-001
EAN	7331021075849
Axis	

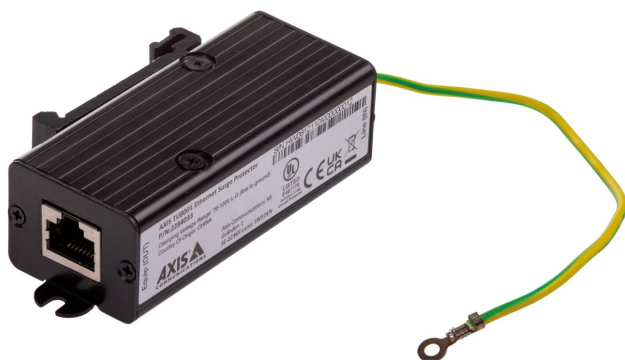

AXIS TU8001 Ethernet Surge Protector helps reduce system downtime, service and maintenance by shielding PoE devices against transient voltage spikes in the Ethernet cable. It is a compact, high-quality product validated to work seamlessly with Axis devices. AXIS TU8001 can be installed close to a PoE switch located indoors or in an outdoor electrical enclosure cabinet adjacent to a network camera or another device. Placing it in an enclosure, you get less exposed wiring, simpler troubleshooting of the whole system and less hardware visible on the pole. The product can be easily mounted on a wall or on a DIN rail.

Zusammenfassung

AXIS TU8001 Ethernet Surge Protector helps reduce system downtime, service and maintenance by shielding PoE devices against transient voltage spikes in the Ethernet cable. It is a compact, high-quality product validated to work seamlessly with Axis devices. AXIS TU8001 can be installed close to a PoE switch located indoors or in an outdoor electrical enclosure cabinet adjacent to a network camera or another device. Placing it in an enclosure, you get less exposed wiring, simpler troubleshooting of the whole system and less hardware visible on the pole. The product can be easily mounted on a wall or on a DIN rail.

Axis 02315-001, Gigabit Ethernet, 10,100,1000 Mbit/s, IEEE 802.3bt, Black, 1000 V, 2 A

Axis 02315-001. Ethernet interface type: Gigabit Ethernet, Ethernet LAN data rates: 10,100,1000 Mbit/s, Networking standards: IEEE 802.3bt. Product colour: Black. Power over Ethernet (PoE) voltage: 1000 V, Input current: 2 A, Power consumption (max): 95 W. Width: 27 mm, Depth: 94 mm, Height: 35 mm

Merkmale

Logistics data

Harmonized System (HS) code	85044095
-----------------------------	----------

Ports & interfaces

Ethernet LAN (RJ-45) ports	1
RJ-45 input ports	1

Network

Ethernet interface type	Gigabit Ethernet
Ethernet LAN data rates	10,100,1000 Mbit/s
Power over Ethernet (PoE)	Yes
Networking standards	IEEE 802.3bt

Operational conditions

Operating temperature (T-T)	-40 - 85 °C
Operating relative humidity (H-H)	0 - 95%

Storage temperature (T-T)	-40 - 85 °C
Storage relative humidity (H-H)	0 - 95%

Features

Product colour	Black
Wall mountable	Yes
Surge protection	Yes

Power

Power over Ethernet (PoE) voltage	1000 V
Input current	2 A
Power consumption (max)	95 W

Weight & dimensions

Width	27 mm
Depth	94 mm
Height	35 mm
Weight	80 g

Preisänderungen und Irrtümer vorbehalten. Alle Produkte solange der Vorrat reicht.