


Digitus 2m Cat6 S-FTP networking cable

Artikel	820584
Herstellernummer	DK-1644-020
EAN	4016032321712
Digitus	

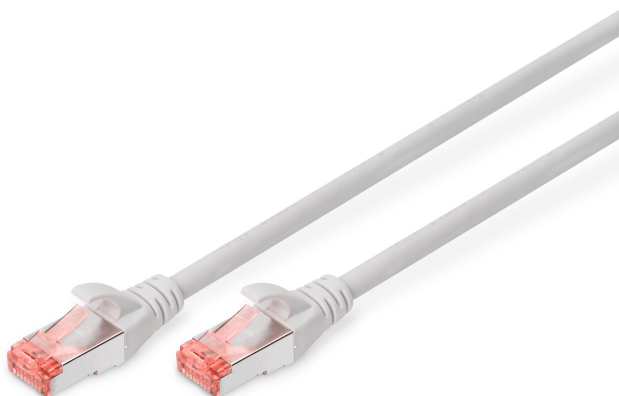

Future-oriented standards and high-end quality for your network.

- With LSZH (Low Smoke Zero Halogen) sheath for best fire behaviour and low smoke emissions.
- Transparent red colored plug with metal shielding for easy identification of Category 6 (250 MHz)
- Conductor: Copper (Cu)
- PoE+ ready

The DIGITUS® Category 6 Class E patch cords are manufactured and tested to the ISO/IEC 11801 and DIN EN 50173 Category 6 specifications. They will guarantee the installed cabling system is compliant with the ISO & EN channel specification requirements and will provide optimum performance levels of DIGITUS® Category 6 cabling. The performance is tested up to 250 MHz inclusive performance characteristics such as near end cross talk ("NEXT"). DIGITUS® patch cords are designed and produced to fulfill the highest requirements of various application areas in full volume. Each cable is fitted with a molded boot which comes with kink protection and strain relief. Furthermore the boot is equipped with a latch protection that prevents the latching lever against breaking. You can easily identify the Category 6, because of the transparent red colored connector.

Zusammenfassung

Future-oriented standards and high-end quality for your network.

- With LSZH (Low Smoke Zero Halogen) sheath for best fire behaviour and low smoke emissions.
- Transparent red colored plug with metal shielding for easy identification of Category 6 (250 MHz)
- Conductor: Copper (Cu)
- PoE+ ready

The DIGITUS® Category 6 Class E patch cords are manufactured and tested to the ISO/IEC 11801 and DIN EN 50173 Category 6 specifications. They will guarantee the installed cabling system is compliant with the ISO & EN channel specification requirements and will provide optimum performance levels of DIGITUS® Category 6 cabling. The performance is tested up to 250 MHz inclusive performance characteristics such as near end cross talk ("NEXT"). DIGITUS® patch cords are designed and produced to fulfill the highest requirements of various application areas in full volume. Each cable is fitted with a molded boot which comes with kink protection and strain relief. Furthermore the boot is equipped with a latch protection that prevents the latching lever against breaking. You can easily identify the Category 6, because of the transparent red colored connector.

Digitus CAT 6 S/FTP patch cord, 2 m, Cat6, S/FTP (S-STP), RJ-45, RJ-45

Digitus CAT 6 S/FTP patch cord. Cable length: 2 m, Cable standard: Cat6, Cable shielding: S/FTP (S-STP), Connector 1: RJ-45, Connector 2: RJ-45

Merkmale

Operational conditions

Operating temperature (T-T) -20 - 60 °C

Other features

Quantity 1

Logistics data

Harmonized System (HS) code 84733080

UK Trade Tariff code 85444210

Packaging data

Package width 140 mm

Package depth 16 mm

Package weight 80 g

Package volume 560 cm³

Package type Polybag

Features

Product colour Grey

Cable length 2 m

Cable standard Cat6

Cable shielding S/FTP (S-STP)

Connector 1 RJ-45

Connector 2 RJ-45

Connector 1 gender Male

Connector 2 gender Male

Jacket material Low smoke zero halogen (LSZH)

AWG wire size 27/7

Certification IEC 60332-1, IEC 60332-3, IEC 61034

Country of origin China

Preisänderungen und Irrtümer vorbehalten. Alle Produkte solange der Vorrat reicht.